DRW NO.	SH	REV
C960-400Z-500	1	05

ZONE	REV	SCR NUMBER	DESCRIPTION	BY	DATE	APPROVED
	04		15.36 WAS 15.48	C.LEIGHTON	08/06/2006	D.MANTER
	05		GEOM TOLERANCE	C.LEIGHTON	12/06/2006	D.MANTER

PART_NUM	GROUND_CONTACT	KEY_POSITION
960-400A-A0B	YES	A
960-400B-A0B	YES	B
960-400C-A0B	YES	C
960-400D-A0B	YES	D
960-400E-A0B	YES	E
960-400F-A0B	YES	F
960-400G-A0B	YES	G
960-400H-A0B	YES	H
960-400Y-A0B	YES	NO KEY
960-400A-A0A	NO	A
960-400B-A0A	NO	B
960-400C-A0A	NO	C
960-400D-A0A	NO	D
960-400E-A0A	NO	E
960-400F-A0A	NO	F
960-400G-A0A	NO	G
960-400H-A0A	NO	H
960-400Y-A0A	NO	NO KEY

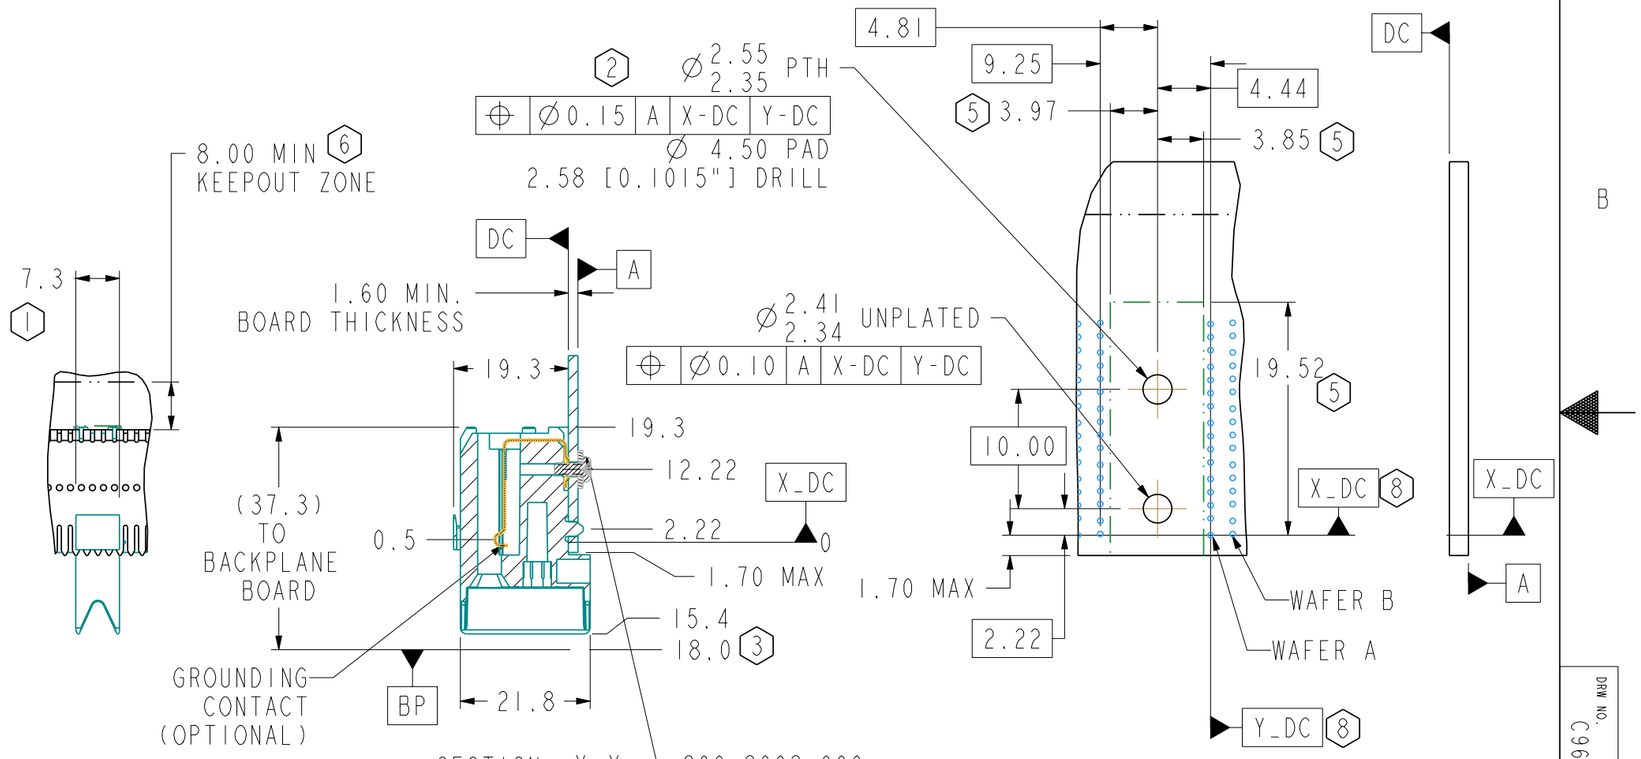

SECTION Y-Y

DAUGHTERCARD HOLE PATTERN
GUIDE/JOINER MODULE
CONNECTOR SIDE
SCALE 2/1

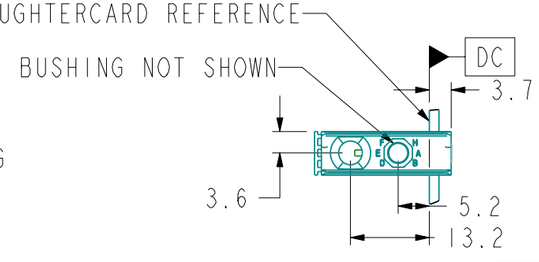

NOTE:
1. NOTE REMOVED
2. PLATED THROUGH HOLE TO CONNECT TO CHASSIS FOR FIRST MATE GROUND OPTION THOUGH GUIDE PIN: SEE TB-2149 FOR ROUTING GUIDELINES. USE UNPLATED THROUGH HOLE FOR UNGROUNDED MODULE
3. NOMINAL DIMENSION FOR FULLY SEATED CONNECTOR
4. FOR MATING GUIDEPIN DETAIL AND LOCATION SEE DRAWING C942-4000-500 FOR STANDALONE GUIDEPIN.
5. NO SURFACE TRACES IN KEEPOUT ZONE.
6. FOR CONNECTOR REPAIRABILITY, USE KEEP OUT ZONE.
7. SEE TB-2XXX FOR BOARD WEIGHT LIMITATIONS.
8. REFER TO C950-400A-500 FOR SIGNAL CONNECTOR DETAIL
9. INSTALLATION TORQUE SPECIFICATION= 3.5IN/LBS ±1.0 IN/LBS.

TOLERANCES	
0.0	±0.25
0.00	±0.13
0.000	± -
ANGLES	± -

DESIGN 07/07/06 C.LEIGHTON
DRAWN 06/29/2006 C.LEIGHTON
CHK 06/30/2006 T.COHEN
APVD 06/30/2006 T.COHEN

INTERPRET PER ASME Y14.5M
CODE IDENT 31413

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM, DECIMAL MAKER IS PERIOD

CUSTOMER USE DRAWING

Amphenol TCS
A Division of Amphenol Corporation
44 Simon Street, Nashua, NH. 03060 603.879.3000

TITLE
4 PAIR DAUGHTERCARD GUIDE MODULE
XCEDE

PART NO. SEE TABLE

DRAWING NO. C960-400Z-500 REV 05

ProePART Q1109-DC-MODULE6
C960-400Z-500--DC4-GUIDED .dwg 1.3 5.0+

SIZE B | SCALE 1/1 | SHEET 1 OF 1

DRW NO. C960-400Z-500 | SH 1 | REV 05